




## FICHA TECNICA

**MATERIAL : POLIURETANO - ANTIABRASIVO**

<b>NORMA</b>	<b>PROPIEDADES</b>	<b>VALORES</b>
(ASTM-D 2240 )	DUREZA EN SHORE	80/85 A
( ASTM- D412 )	MODULO DE ELASTICIDAD AL 100% psi ( Mpa )	1100 ( 7.6 )
( ASTM-D412 )	RESISTENCIA A LA TENSION psi ( Mpa )	5500 ( 37.9 )
(ASTM-D624)	RESIST. AL DESGARRO pli ( KN/m )	90 ( 15.7 )
(ASTM-D2240)	RESILENCIA REBOTE BASHORE %	42
(ASTM -D792 )	GRAVEDAD ESPECIFICA	1.11
(ASTM D395)	COMPRESSION SET % 22 HORAS/ 158 °F ( °C ) METODO B	30%

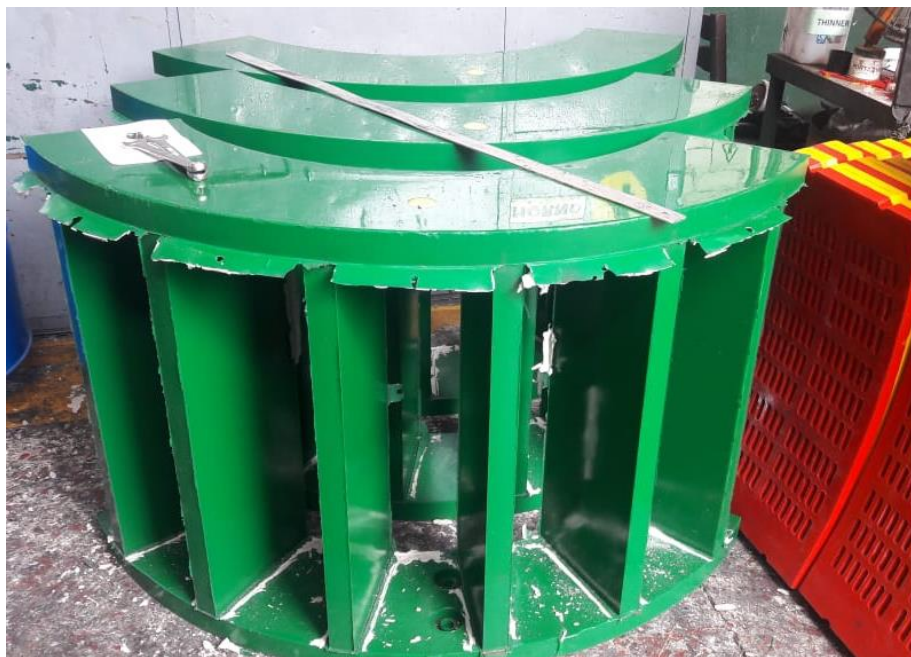



**REYMOsa S.A.**

